




BARTONTECH 800 PLUS HORIZONTAL BALER

ADVANTAGES AND DESCRIPTION OF THE MACHINE

- Professional, semi-automatic baler, BARTONTECH 800 PLUS ensures a capacity of 2 tons per hour,
- The main feature of the 800 PLUS baler is the ability to throw a single bale thanks to the use of an extended actuator,
- When the appropriate amount of waste is compacted under a given pressure, the machine will signal the end of the pressing cycle,
- Equipped with a full bale indicator,
- Possibility to configure the machine to meet special customer requirements,
- Equipped with three-phase voltage and safety lock,
- Ability to freely set the beam length,
- Smooth regulation of hydraulic system pressure,
- Siemens PLC controller,
- Maintenance-free hydraulic system,
- Long service life,
- Low failure rate,
- Up to 5 years warranty,
- Warranty and post-warranty service.

SEE THE VIDEO: <https://www.youtube.com/watch?v=RZa16mN4ayY>

TECHNICAL SPECIFICATION			
DIMENSION (height/width/depth) mm	2805 x 1750 x 7050	WEIGHT OF A BALE	400 - 700 kg
WEIGHT OF THE BALER	7800 kg	CRUSHING FORCE	75 t
INLET SIZE	1900 x 970	CAPACITY	2 t/h
BALE DIMENSION (height/width/depth) mm	1100 x 1020 x 1300 - 1500	CAPACITY	5
ELECTRIC VOLTAGE	400V	BINDING DIRECTION	Horizontal
ENGINE SPEED	1440 rpm	BALE WIREING	3.0mm - 3,5mm, 8m - length
PRESSURE	250 bar	NUMBER OF ACTUATORS	2
STANDARD TIME OF CRUSHING CYCLE	15 kW/75sec 22Kw/60sec	ELECTRIC MOTOR	35A (motor 15 kW) 50A (motor 22kW)
LENGHT OF POWER SUPPLY CABLE	6 m	INNER ELECTRICAL CIRCLE	24v DC

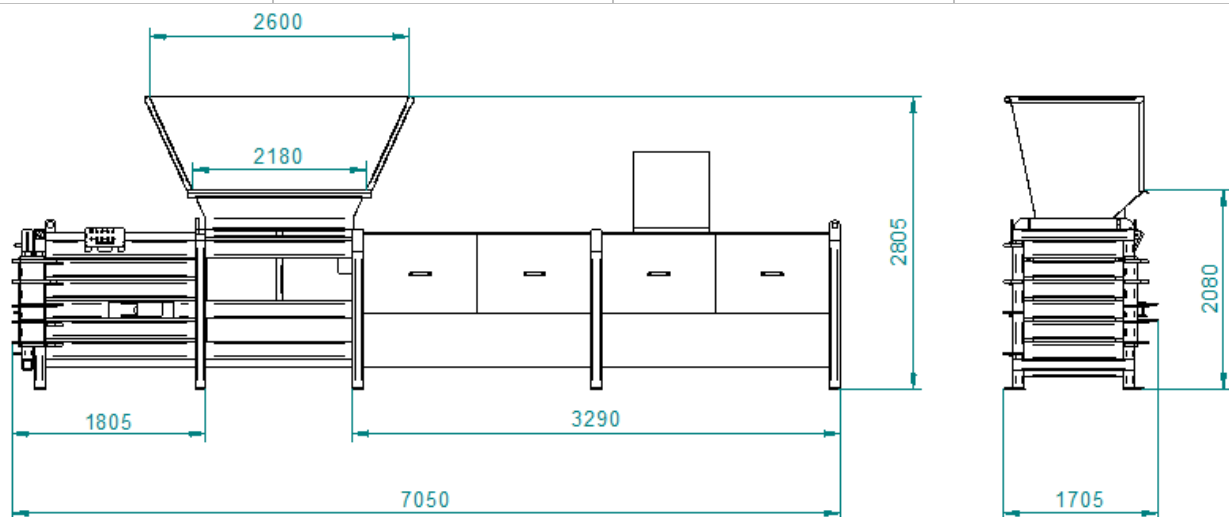

CHARACTERISTICS	BENEFITS
Cutting blade on top of the press plate.	Allows easy cutting of material after loading.
15 kW motor.	Reduced cycle time.
Sensor actuation.	The operator can continuously feed material into the machine, eliminating downtime.
Automatic cutting when the bale is full.	The operator receives information when the bale is ready to be tied.
Simple controls.	User-friendly.
Standard hopper.	It allows easy feeding of material to the machine, saving time.
Solid construction.	Ensures long machine life.
IP55 Protection class.	Possibility of installation inside and outside buildings.
CE designation.	Ensures high safety standards.

The standard 800 series press comes with:	Optional extras:
Motor 15 kW.	Oil heater.
Hydraulic door closing.	Oil cooler.
Full bale signaling.	Motor 22kW/30kW.
	Backwards preventers (holding teeth).
	Hardox floor.
	Door shock absorber.
	Infinitely adjustable full bale signalling pressure.
	Audible signal and additional full bale light.
	Enlarged oil tank - 500l.
	Non-standard colour.
	Touch panel HMI.
	Control panel protection.
	Sliding down to the bales.
	Non-standard hopper.
	External device control from the baler level.
	Backwards preventers (holding teeth).

Other devices available in our company's offer:

- Vertical balers,
- Automatic balers,
- Specialized devices,
- Styrofoam compactors,
- Feeders,
- Sorting lines.

CONTACT

Bartontech, Rafał Barton

ul. Wodna 10, 89-412 Sośno

Phone: +48 783 891 132

e-mail: office@bartontech.eu