

BARTONTECH




BARTONTECH 800 SHORT HORIZONTAL BALER

ADVANTAGES AND DESCRIPTION OF THE MACHINE

- Professional, semi-automatic baler, BARTONTECH 600 MAX provides a capacity of 2 tons per hour,
- The main feature of the 600 MAX baler is the ability to throw a single bale thanks to the use of an extended actuator,
- When the appropriate amount of waste is compacted under a given pressure, the machine will signal the end of the pressing cycle,
- Equipped with a full bale indicator,
- Possibility to configure the machine to meet special customer requirements,
- Equipped with three-phase voltage and safety lock,
- Ability to freely set the beam length,
- Smooth regulation of hydraulic system pressure,
- Siemens PLC controller,
- Maintenance-free hydraulic system,
- Long service life,
- Low failure rate,
- Up to 5 years warranty,
- Warranty and post-warranty service.

SEE THE VIDEO: https://www.youtube.com/watch?v=fGqwc_R4Flo

TECHNICAL SPECIFICATION			
DIMENSION (height/width/depth) mm	2700 x 1700 x 5900	WEIGHT OF A BALE	800 - 1000 kg
WEIGHT OF THE BALER	7200 kg	CRUSHING FORCE	75 ton
INLET SIZE	1370 x 950	CAPACITY	2 t/h
BALE DIMENSION (height/width/depth) mm	1100 x 1000 x 1200 - 1400	NUMBER OF WIRES	5
ELECTRIC VOLTAGE	400V	BINDING DIRECTION	Horizontal
ENGINE SPEED	1440 rpm	BALE WIREING	3,0 - 3,5mm 8m - length
PRESSURE	210 bar	NUMBER OF ACTUATORS	2
STANDARD TIME OF CRUSHING CYCLE	15 kW/55sec 22Kw/40sec	ELECTRIC MOTOR	27A (motor 11kW) 35A (motor 15 kW)
LENGHT OF POWER SUPPLY CABLE	6 m	INNER ELECTRICAL CIRCLE	24v DC

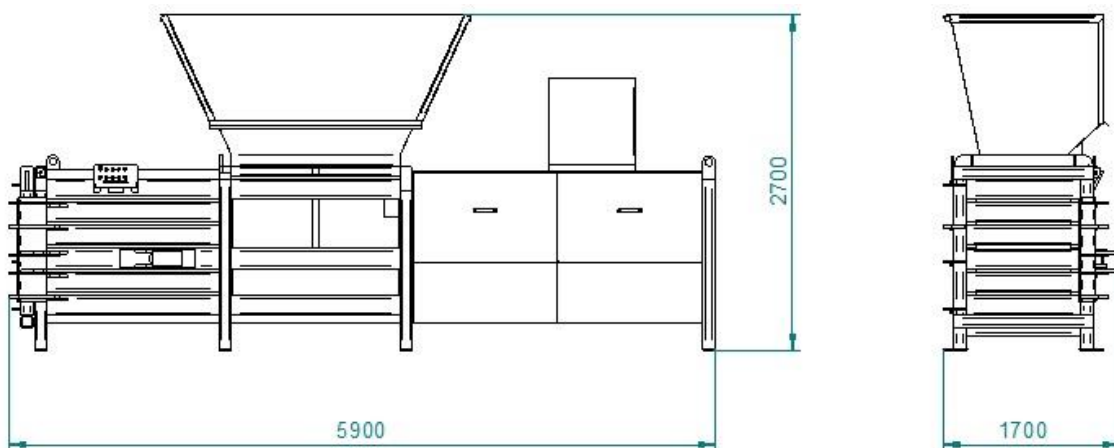

CHARACTERISTICS	BENEFITS
Sensor actuation.	The operator can continuously feed material into the machine, eliminating downtime.
Automatic cutting when the bale is full.	The operator receives information when the bale is ready to be tied.
Binding on every bale length.	Ability to adjust bale size to maximize the amount of material in the container.
Simple controls.	User-friendly.
Standard hopper.	It allows easy feeding of material to the machine, saving time.
Solid construction.	Ensures long machine life.
IP55 Protection class.	Possibility of installation inside and outside buildings.
CE designation.	Ensures high safety standards.

The standard 800 series press comes with:	Optional extras:
Motor 15 kW.	Oil heater.
Hydraulic door closing.	Oil cooler.
Full bale signaling.	Motor 22kW/30kW.
	Backwards preventers (holding teeth).
	Hardox floor.
	Door shock absorber.
	Infinitely adjustable full bale signalling pressure.
	Audible signal and additional full bale light.
	Enlarged oil tank - 500l.
	Non-standard colour.
	Touch panel HMI.
	Control panel protection.
	Sliding down to the bales.
	Non-standard hopper.
	External device control from the baler level.

Other devices available in our company's offer:

- Vertical balers,
- Automatic balers,
- Specialized devices,
- Styrofoam compactors,
- Feeders,
- Sorting lines.

CONTACT

Bartontech, Rafał Barton

ul. Wodna 10, 89-412 Sośno

Phone: +48 783 891 132

e-mail: office@bartontech.eu